



AUTOMASTER
THE AUTO EQUIPMENT SPECIALISTS

Peak P-209X-S

PEAK



Peak P-209X-S

4000kg 2 Post Base Plate Hoist




OUR VICE-GRIP GUARANTEE

If you're not happy, we replace or refund in full.



4 three-stages arms are suitable for a wide range of vehicles.

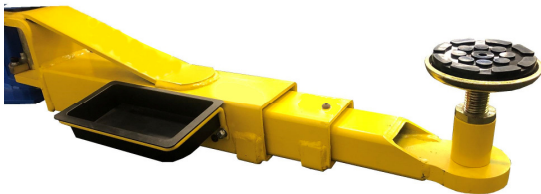

FEATURES

- Only 100mm concrete thickness required (minimum)
- 4000kg (9,000lbs) capacity.
- Dual hydraulic chain-over cylinders manufactured to ANSI standard
- 4 three-stages arms are suitable for easy load of a large range of cars, vans & 4x4's
- 3/8" aircraft quality cable is used for balancing
- Single-point safety release, allow technician to disengage both column simultaneously.
- Self-lubricating UHMW Polyethylene sliders and bronze bushes.
- Base-Plate design, great for low roof or extra high top vehicles
- Automatically activated double safety locks built into each column .
- Screw up feet with 4x4 adapters
- Rubber door guards attached to each carriage
- Standard toe guards & 2 x tool trays on lifting arms.
- Low service costs
- European CE Safety Certified
- Full 2 year warranty




Quality alloy body electric motor.


Manual down valve.



Two Locks, One Release, Only Available By PEAK.

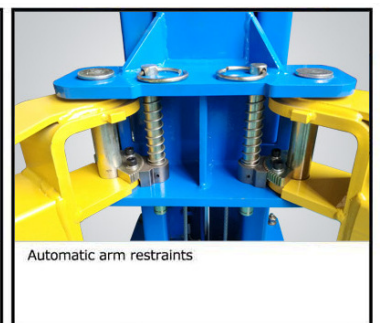


Automatic arm restraints

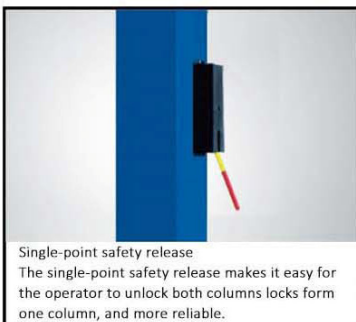


Single-point safety release

The single-point safety release makes it easy for the operator to unlock both columns locks form one column, and more reliable.

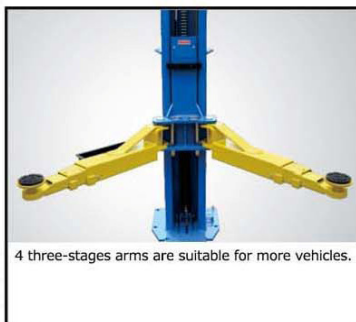

4 three-stages arms are suitable for more vehicles.

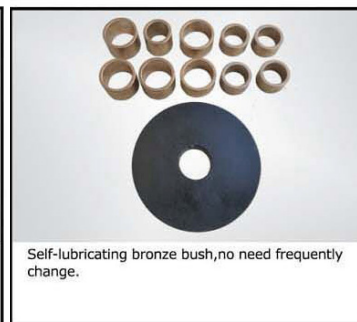

Self-lubricating bronze bush, no need frequently change.



Screw up feet & 2.5' 4x4 extensions



Peak P-209X-S

4000kg 2 Post Base Plate Hoist


OUR VICE-GRIP GUARANTEE

If you're not happy, we replace or refund in full.

PEAK®

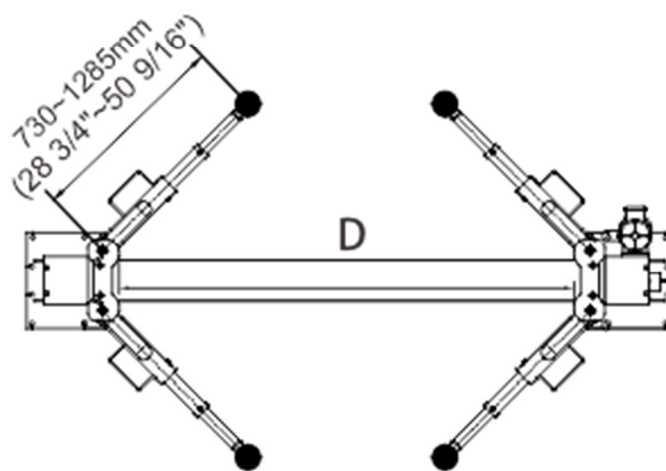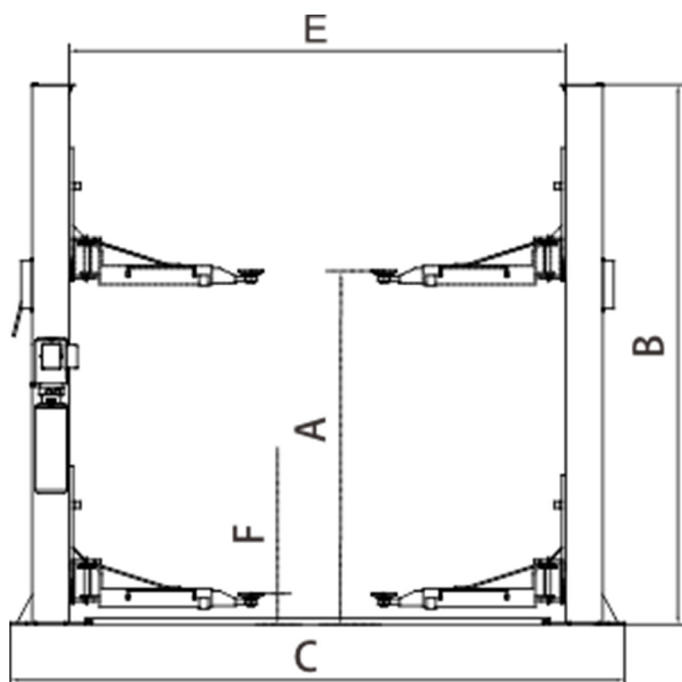
Model 209X

Base plate two post lift

Lifting Capacity	4000kg (9,000 lbs)
Lifting Time	49s
Max. Lifting height: (w/o extension adapter)	1939mm (76 5/16") ~1987mm(78 1/4")
Max. Lifting height: (w/ extension adapter)	2015mm (79 5/16") ~2063mm(81 1/4")
Max. lock height: (w/o extension adapter)	1899mm (74 3/4") ~1947mm(76 5/8")
Max. lock height: (w/ extension adapter)	1975mm (77 3/4") ~2023mm(79 5/8")
Overall Height	B 2841m (111 7/8")
Overall Width	C 3460mm (136 1/4")
Drive-Thru Clearance	D 2560mm (100 3/4")
Width Between Columns	E 2850mm (112 1/4")
Minimum Pad Height	F 89mm (3 1/2")
Gross Weight	717kg (1,581 lbs)
Motor	3.0HP
QTY of Container	20 Units/20'GP 40 Units/40'GP
Packing Dimension	2900 X 510 X 790 mm