

## /// AUTOM

THE AUTO EQUIPMENT SPECIALISTS



**Pro Series Tyre Changer** 











## **Automaster AM-203IT**

# SERVICE OUR VICE-GRIP GUARANTEE If you're not happy, we replace or refund in full.

#### **Pro Series Tyre Changer**



Rim clamping range from outside 10"- 22" inside 12"- 24"

By adjustable jaws.

This provides a huge range without the need for an oversized turntable





Automaster Tyre machines deliver years of dependability because they are built using only the highest quality components

#### **FEATURES**

- The Automaster AM-203IT *Pro Series* Heavy duty tyre changer is our most popular in the Automaster line up.
- It is the perfect changer for busy workshops or tyre shops.
- Engineered for professionals who demand reliability, strength, and high performance — all at an exceptional price."
- Heavy duty pneumatically controlled tilt-back column
- Supplied standard with a pedal controlled inflation gauge and tubeless air blaster system
- Options of a 1 speed 1Ph motor or 3ph-2 speed motor.
- Pedal controlled tyre inflation
- Tubeless air blast inflation system with air accumulation tank. Pedal controlled. Each jaw clamp has an angled jet outlet for the tubeless air blaster system.
- Powerful bead breaker is designed to break even the most stubborn and rusted beads without damage.
- Reinforced Chassis and column
- Pneumatic locking mechanism automatically gives vertical and horizontal clearance from the rim to avoid scratches on the face of the wheel - an essential feature when dealing with alloy wheels.
- Optional HP2 low profile helper arms, or twin helper arms to make changing difficult tyres easy, and help reduce the risk of damage caused by tyre levers.
- Optional ATV or M/C adapters





Tubeless air blast inflation system with air accumulation tank. Pedal controlled. Each jaw clamp has an angled jet outlet for the tubeless air blaster system.


## **Automaster AM-203IT**


# SERVICE OUR VICE-GRIP GUARANTEE If you're not happy, we replace or refund in full.

#### **Pro Series Tyre Changer**



SPECIFICATIONS	
Inside wheel clamping	12"- 24" By adjustable jaws
Outside wheel clamping	10"- 22" By adjustable jaws
Maximum tyre diameter	39"
Rim width	3-14"
Motor Power	230v/1ph or 380V 3ph 2 Speed
Turn Table Torque	1200nm

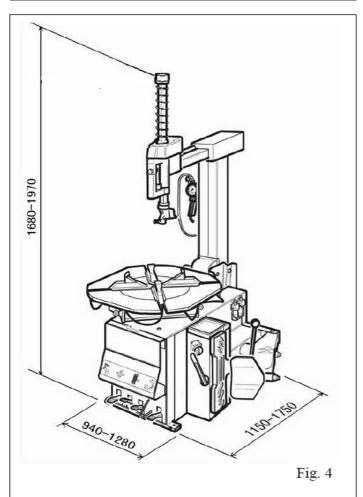





SPECIFICATIONS		
Bead breaker force	3000kg	
Operating pressure	100psi	
Locking mechanism	Pneumatic	
Machine weight	295kg	
Tilting column	Pneumatic	
Warranty	2 Years	

Optional twin Left & right helper arms are a universal multifunctional device with the added benefit of individual control of each bead pressing tool. Easily and safely change low profile, run flat & UHP tyres.

